

RECAST PENDANT LIGHTING

evolving aesthetics
of no-waste production

WAARMAKERS



WAARMAKERS

Waarmakers V.O.F.

Keerpunt 10, 1013 DK

Amsterdam, the Netherlands

tel +31 20 261 76 68

email info@waarmakers.nl




web store.waarmakers.nl

Product : LED bulb pendant luminary
Model / Type : Recast pendant lighting /2021.1
Power : 220-240V
Production year : 2021

2014/35/EU - Low voltage directive
2014/30/EU - Electromagnetic compatibility
2011/65/EU - RoHS



RoHS

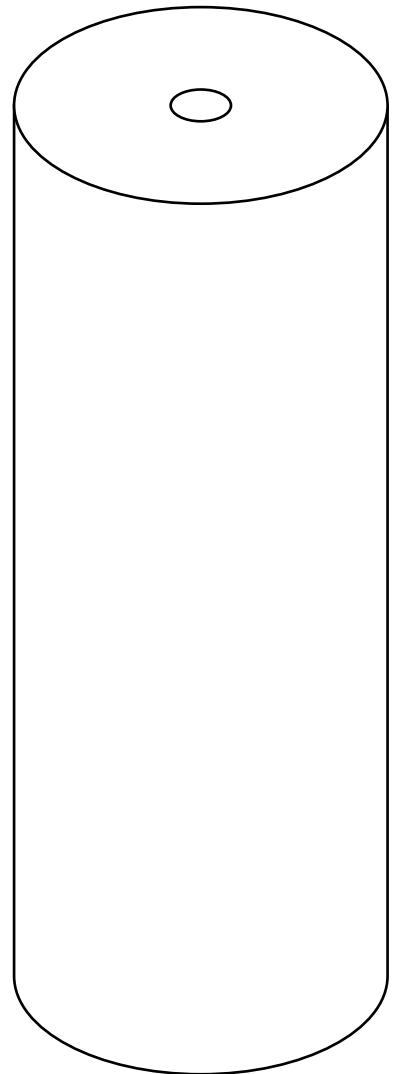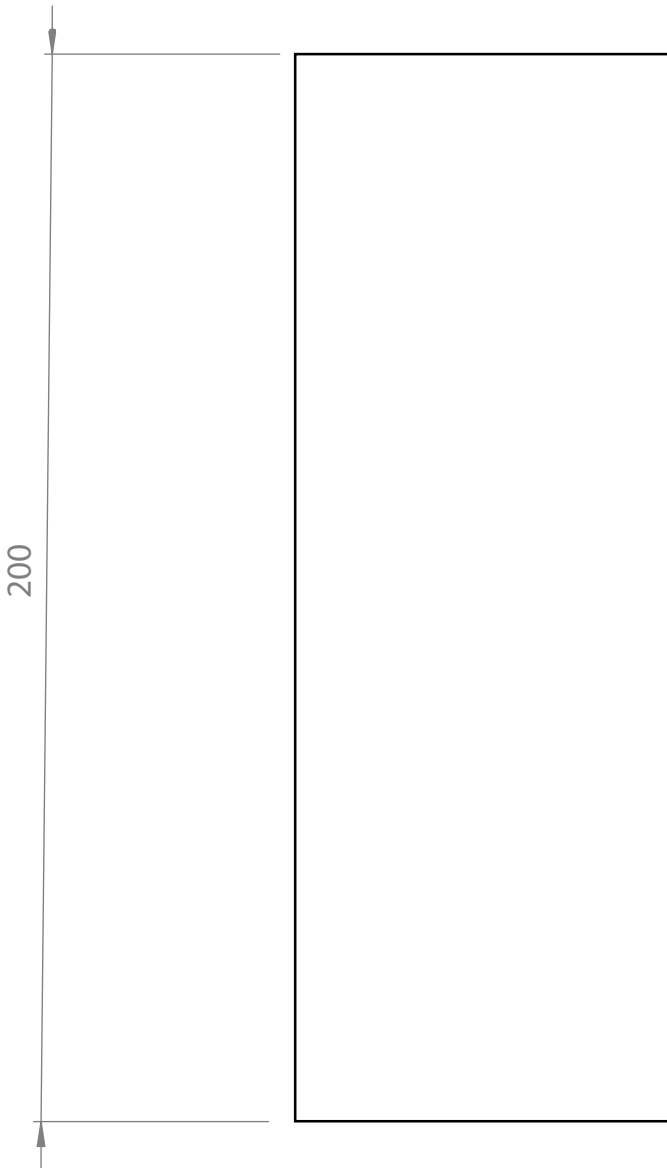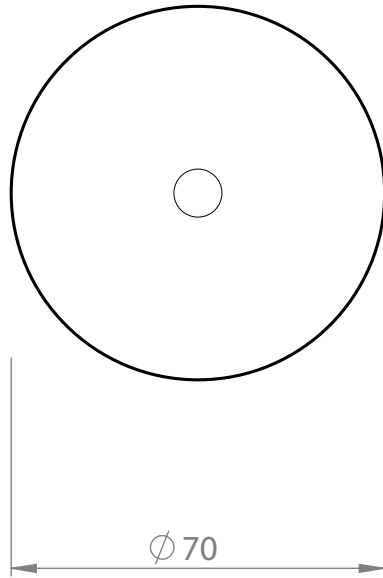

Dimensions





LED light source

	LED SPOT	GLOBE
Glass Finish	OPAL glass	MATTE FROSTE glass
LED cap base	E14	E27
Power consumption	4 W	35 W
Voltage	220-240 V	220-240 V
Luminous flux	250 lm	400 lm
Length	135 mm	84 mm
Diameter	9 mm	50 mm
Color Temperature	2500K	2500K
Color Rendering Index	>90 Ra	>90 Ra
Dimmable	YES	YES
Rated Lifetime	25000 hours	25000 hours
Energy Efficiency Label	A+	A+

DIMMING LIST COMPATABILITY

DIMMER BRAND	MODEL	SPECS
Jung	1730 DD	3 - 60 Watt
Schneider Electric Merten	MTN5134 - 0000	4 - 400 Watt
Gira	2262 00	3 - 100 Watt

*Other dimmers can yield good results and we recommend conducting your own test before final installation






Material

body
colours

Polymer concrete
On request

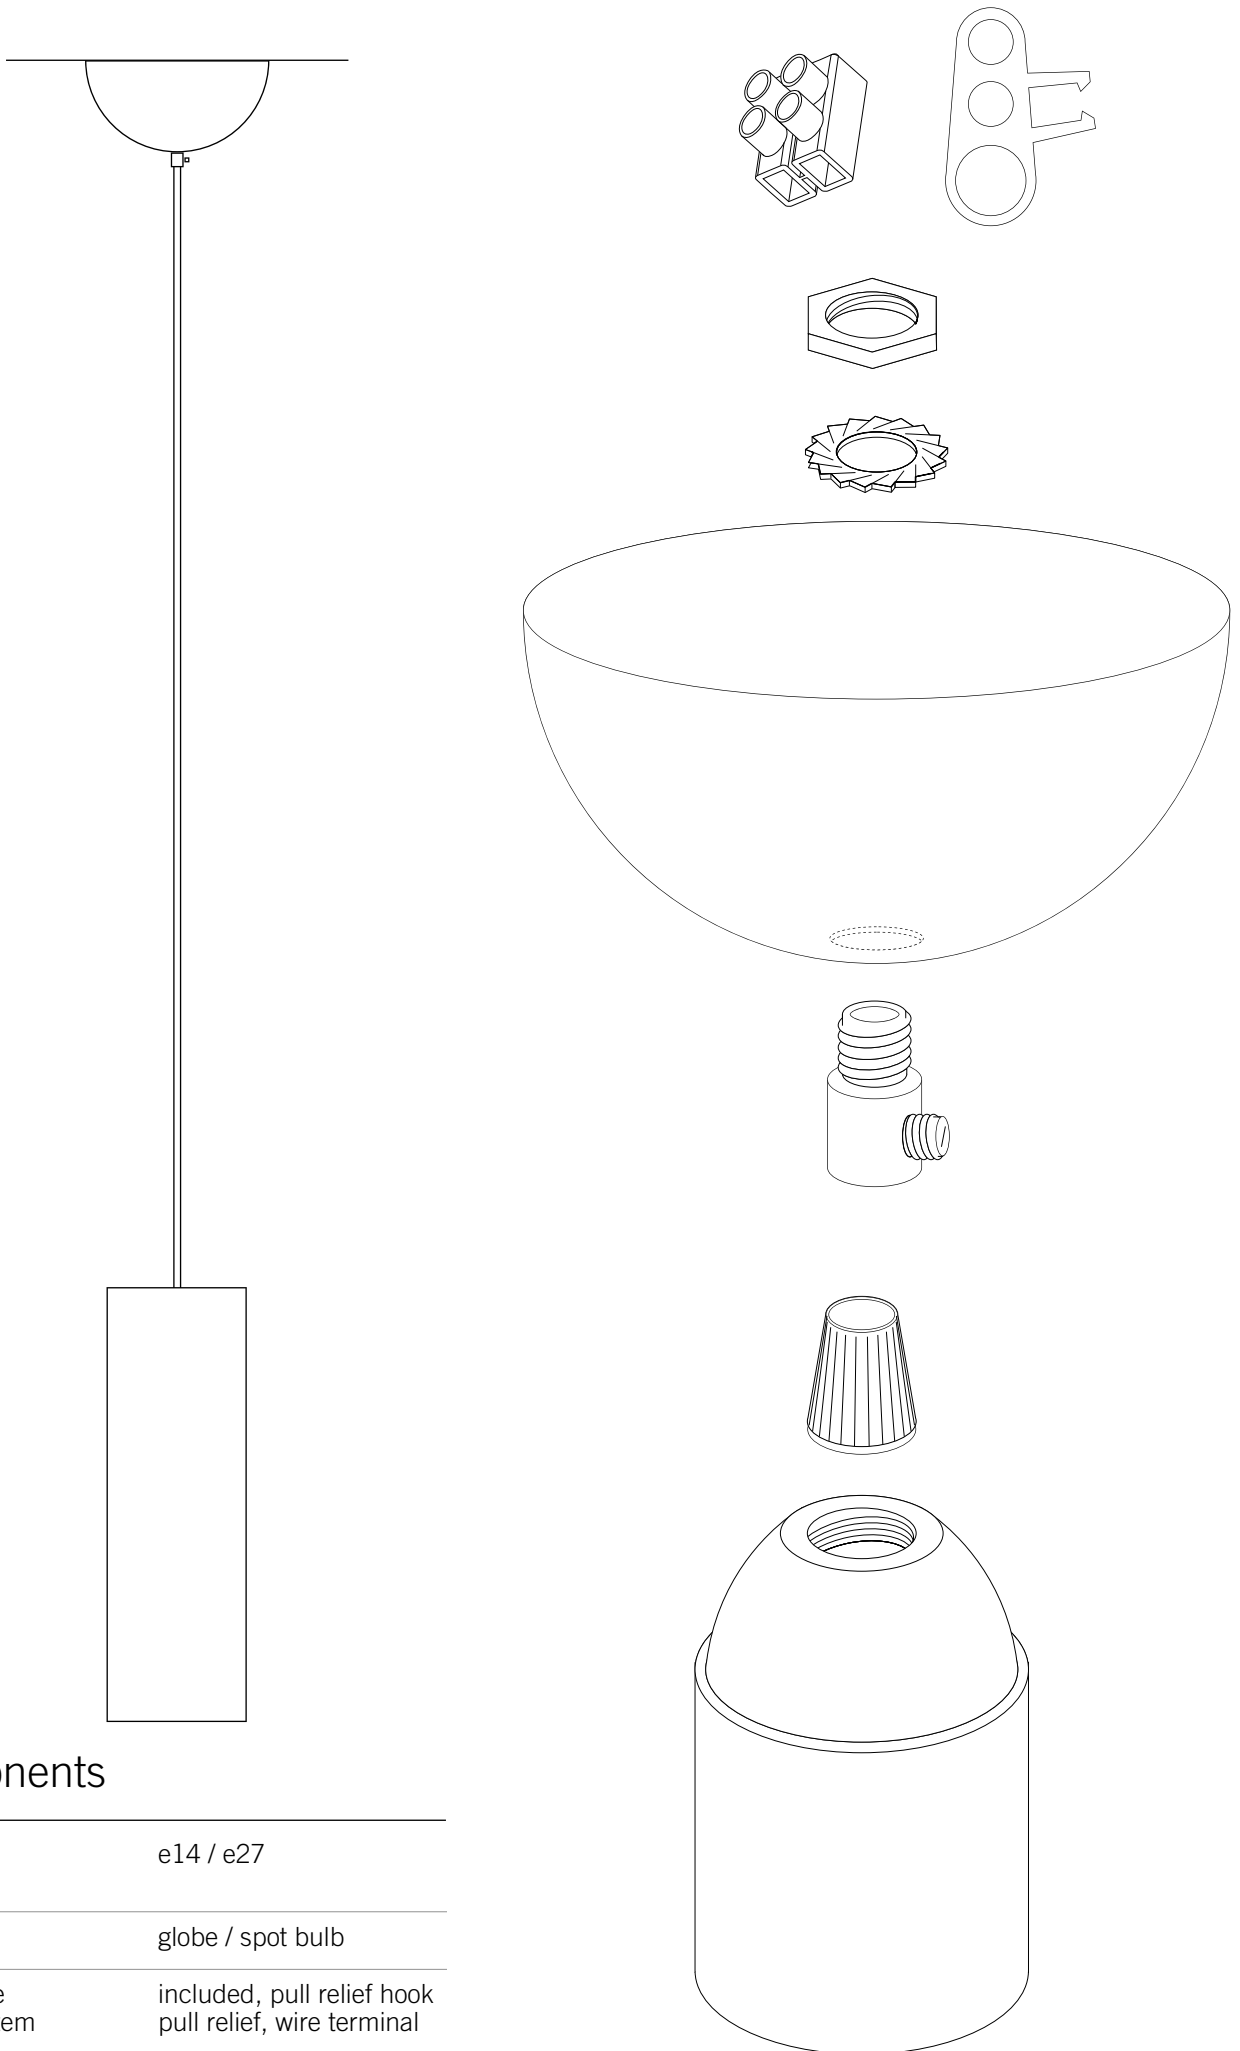

Components

lampholder	e14 / e27
light source	globe / spot bulb
power cable canopy system	included, pull relief hook pull relief, wire terminal
screws / plugs	not included

